


D8 series Mini downlight



Catalog No. _____



Date _____

Type _____

Project _____



D8-1-700 (700mA @2.19W)

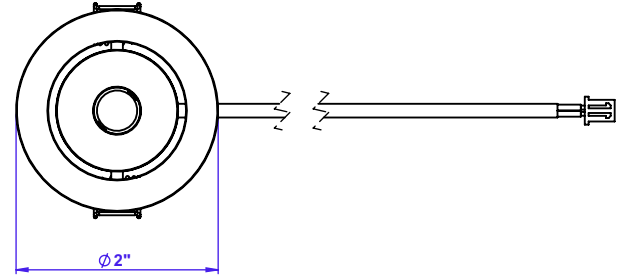
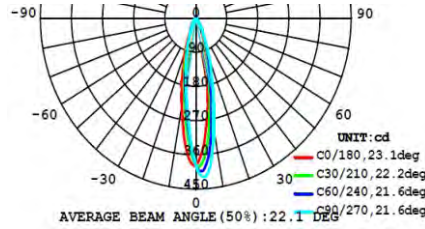


Finishes:

- Silver
- White
- Bronze
- Black

Optical Lens:

- NFL (20 degrees)
- WFL (40 degrees)

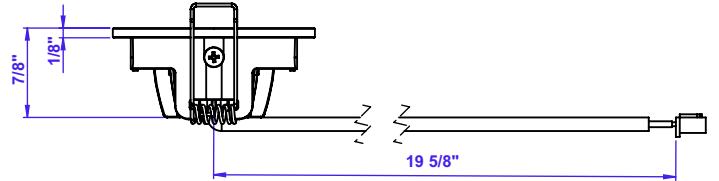

Description

D8-1-700 LED Puck Light is a 700mA mini recessed cabinet light on a gimbal ring. Using D8-S01 mounting ring will allow this series to be surface mounted. When using with matching constant current LED driver which will allow multiple lights to be connected with a single driver. 3000K or 5000K, 72 lm/watt 80+ CRI. (Optional 90+ CRI is available). ETL listed for USA & Canada.

LED Performance

- LED:** 2.19 watt @ 700mA
- SDCM:** 3 Step Macadam Ellipse
- CCT:** 3000K, 5000K
- CRI:** >80 Typically 83 (Optional 90+ CRI is available)
- LIFE:** 70% of initial lumens after 50,000 hrs
- Warranty:** 5 Year Limited Fixture Warranty

Technical Specs

- Typical 2.19W, 700mA constant current input
- 157 lumens
- Standard molex connection
- Dimmable (with Dimming Driver)
- Specify Driver separately
- 1 to 2, 1 to 4 and 1 to 6 multiple connectors
- NFL 20 degrees & WFL 40 degrees optical lens

Optional Accessories

- Dimmable drivers
- Multiple connector 1-2, 1-4 & 1-6
- Surface mount collar D8-S01
- Four finishes, Bronze, Black, Silver & White
- Cord extension


Ordering Codes

Follow the steps to specify your fixture. To order D8-1-700 LED puck NFL (20 degrees) in 3000K white finish

example: D8-1-700-NFL-WW

① Base Code	② Lens Code	③ Color Code	④ CCT Code
D8-1-700	NFL 20 degrees	SV Silver WH White BK Black BZ Bronze	WW 3000K CW 5000K

D8 series Mini downlight




Catalog No. _____


Date _____

Type _____

Project _____

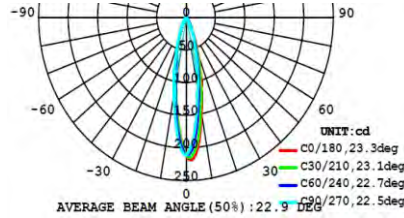

D8-1


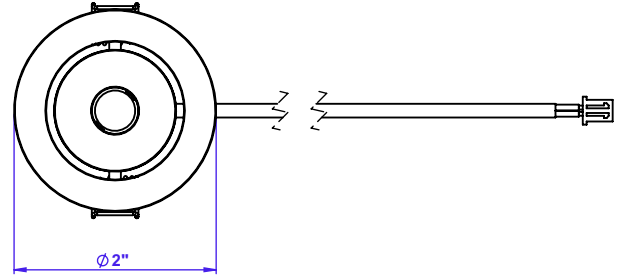


Finishes:

- Silver
- White
- Bronze
- Black

Optical Lens:

- NFL (20 degrees)
- WFL (40 degrees)

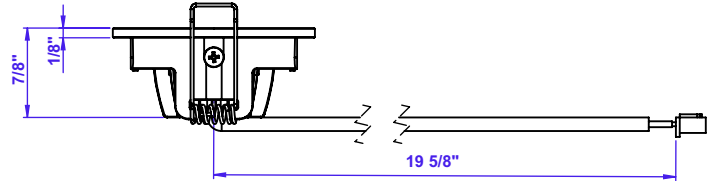

Description

D8-1 LED Puck Light is a 350mA mini recessed cabinet light on a gimbal ring. Using D8-S01 mounting ring will allow this series to be surface mounted. When using with matching constant current LED driver which will allow multiple lights to be connected with a single driver. 3000K or 5000K, 95 lm/watt with 80+ CRI. (Optional 90+ CRI is available). ETL listed for USA & Canada.

LED Performance

- LED:** 1.02 watt @ 330mA typical 1.2 watt max @ 350mA
- SDCM:** 3 Step Macadam Ellipse
- CCT:** 3000K, 5000K
- CRI:** >80 Typically 83 (Optional 90+ CRI is available)
- LIFE:** 70% of initial lumens after 50,000 hrs
- Warranty:** 5 Year Limited Fixture Warranty

Technical Specs

- Typical 1.02W, 330mA constant current input 350mA max.
- 95 lumen
- Standard molex connection
- Dimmable (with Dimming Driver)
- Specify Driver separately
- 1 to 2, 1 to 4 and 1 to 6 multiple connectors
- NFL 20 degrees & WFL 40 degrees optical lens

Optional Accessories

- Dimmable drivers
- Multiple connector 1-2, 1-4 & 1-6
- Surface mount collar D8-S01
- Four finishes, Bronze, Black, Silver & White
- Cord extension


Ordering Codes

Follow the steps to specify your fixture. To order D8-1 LED puck NFL (20 degrees) in 3000K white finish

example: D8-1-NFLWH-WW

① Base Code	② Lens Code	③ Color Code	④ CCT Code
D8-1	NFL 20 degrees	SV Silver WH White BK Black BZ Bronze	WW 3000K CW 5000K

D8 series Mini downlight



Catalog No. _____


Date _____

Type _____

Project _____



D8-3



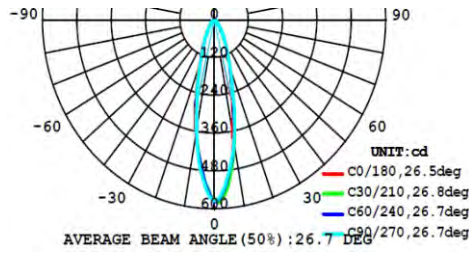


Finishes:

- Silver
- White
- Bronze
- Black

Optical Lens:

- NFL (20 degrees)
- WFL (40 degrees)

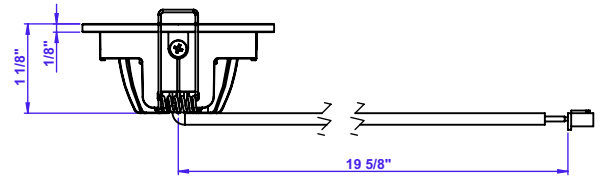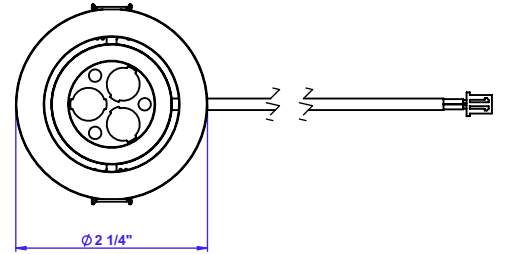

Description

D8-3 LED Puck Light is a 350mA mini puck & recessed cabinet light on a gimbal ring. Using D8-S03 mounting ring will allow this series to be surface mounted. When using with matching constant current LED driver which allows multiple light fixtures to be connected with a single driver. 3000K or 5000K, 95 lm/watt 80+ CRI. (Optional 90+ CRI is available). ETL listed for USA & Canada.

LED Performance

- LED:** 3.04 watt @ 350mA
- SDCM:** 3 Step Macadam Ellipse
- CCT:** 3000K, 5000K
- CRI:** >80 Typically 83 (Optional 90+ CRI is available)
- LIFE:** 70% of initial lumens after 50,000 hrs
- Warranty:** 5 Year Limited Fixture Warranty

Technical Specs

- 3.04W, 350mA constant current input
- 285 lumen
- Standard molex connection
- Dimmable (with Dimming Driver)
- Specify Driver separately
- 1 to 2, 1 to 4 and 1 to 6 multiple connectors
- NFL 20 degrees & WFL 40 degrees optical lens

Optional Accessories

- Dimmable drivers
- Multiple connector 1-2, 1-4 & 1-6
- Surface mount collar D8-S03
- Four finishes, Bronze, Black, Silver & White
- Cord extension


Ordering Codes

Follow the steps to specify your fixture. To order STDC08-3 LED puck NFL (20 degrees) in 3000K white finish

example: D8-3-NFL-WW

① Base Code	② Lens Code	③ Code Colour	④ CCT Code
D8-3	NFL 20 degrees	SV Silver WH White BK Black BZ Bronze	WW 3000K CW 5000K

D8 series Mini downlight



Catalog No. _____



Date _____

Type _____

Project _____



D8-4

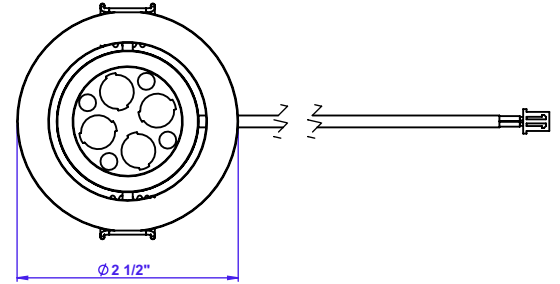
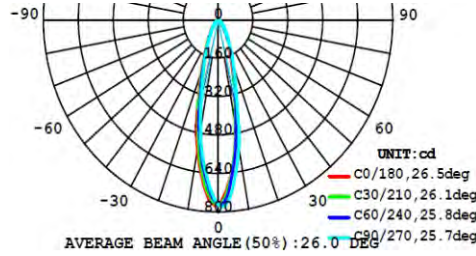


Finishes:

- Silver
- White
- Bronze
- Black

Optical Lens:

- NFL (20 degrees)
- WFL (40 degrees)

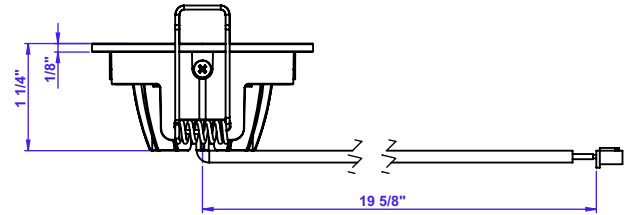

Description

D8-4 LED Puck Light is a 350mA mini puck & recessed cabinet light on a gimbal ring. Using D8-S04 mounting ring will allow this series to be surface mounted. When using with matching constant current LED driver which allows multiple light fixtures to be connected with a single driver. 3000K or 5000K, 95 lm/watt 80+ CRI. (Optional 90+ CRI is available). ETL listed for USA & Canada.

LED Performance

- LED:** 4.05 watt @ 350mA typical
- SDCM:** 3 Step Macadam Ellipse
- CCT:** 3000K, 5000K
- CRI:** >80 Typically 83 (Optional 90+ CRI is available)
- LIFE:** 70% of initial lumens after 50,000 hrs
- Warranty:** 5 Year Limited Fixture Warranty

Technical Specs

- 4.05W, 350mA constant current input
- 386 lumen
- Standard molex connection
- Dimmable (with Dimming Driver)
- Specify Driver separately
- 1 to 2, 1 to 4 and 1 to 6 multiple connectors
- NFL 20 degrees & WFL 40 degrees optical lens

Optional Accessories

- Dimmable drivers
- Multiple connector 1-2, 1-4 & 1-6
- Surface mount collar D8-S04
- Four finishes, Bronze, Black, Silver & White
- Cord extension


Ordering Codes

Follow the steps to specify your fixture. To order D8-4 LED puck NFL in 3000K white finish

example:

① Base Code	② Lens Code	③ Color code	④ CCT Code
D8-4	NFL 20 degrees	SV Silver WH White BK Black BZ Bronze	WW 3000K CW 5000K

D8 series Mini downlight



Catalog No. _____


Date _____

Type _____





Project _____

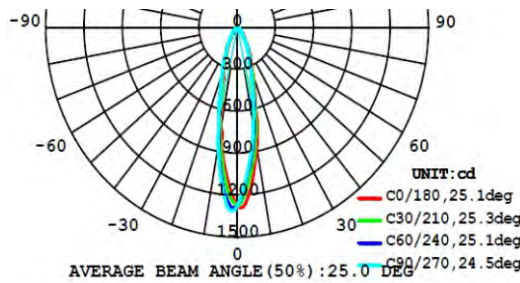

D8-6






Finishes:

-  Silver
-  White
-  Bronze
-  Black

Optical Lens:

-  NFL (20 degrees)
-  WFL (40 degrees)

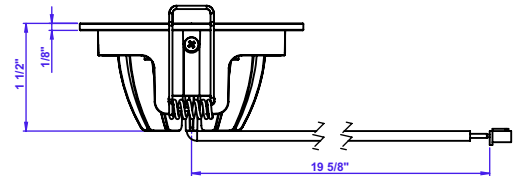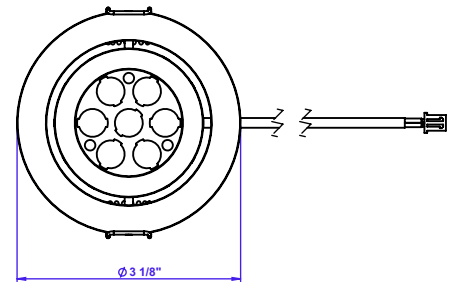

Description

D8-6 LED Puck Light is a 350mA mini puck & recessed cabinet light on a gimbal ring. Using D8-S07 mounting ring will allow this series to be surface mounted. When using with matching constant current LED driver which allows multiple light fixtures to be connected with a single driver. 3000K or 5000K, 95 lm/watt 80+ CRI. (Optional 90+ CRI is available). ETL listed for USA & Canada.

LED Performance

- LED:** 6.09watt @ 350mA typical
- SDCM:** 3 Step Macadam Elipse
- CCT:** 3000K, 5000K
- CRI:** >80 Typically 83 (Optional 90+ CRI is available)
- LIFE:** 70% of initial lumens after 50,000 hrs
- Warranty:** 5 Year Limited Fixture Warranty

Technical Specs

- 6.09W, 350mA constant current input
- 590 lumen
- Standard mox connection
- Dimmable (with Dimming Driver)
- Specify Driver separately
- 1 to 2, 1 to 4 and 1 to 6 multiple connectors
- NFL 20 degrees & WFL 40 degrees optical lens

Optional Accessories

- Dimmable drivers
- Multiple connector 1-2, 1-4 & 1-6
- Surface mount collar D8-S07
- Four finishes, Bronze, Black, Silver & White
- Cord extension


Ordering Codes

Follow the steps to specify your fixture. To order D8-6 LED fixture NFL in 3000K white finish

example: D8-6-NFL-SV-WW

① Base Code	② Lens Code	③ Color Code	④ CCT Code												
D8-6	NFL 20 degrees	<table border="0"> <tr><td style="border: 1px solid black; padding: 2px;">SV</td><td>Silver</td></tr> <tr><td style="border: 1px solid black; padding: 2px;">WH</td><td>White</td></tr> <tr><td style="border: 1px solid black; padding: 2px;">BK</td><td>Black</td></tr> <tr><td style="border: 1px solid black; padding: 2px;">BZ</td><td>Bronze</td></tr> </table>	SV	Silver	WH	White	BK	Black	BZ	Bronze	<table border="0"> <tr><td style="border: 1px solid black; padding: 2px;">WW</td><td>3000K</td></tr> <tr><td style="border: 1px solid black; padding: 2px;">CW</td><td>5000K</td></tr> </table>	WW	3000K	CW	5000K
SV	Silver														
WH	White														
BK	Black														
BZ	Bronze														
WW	3000K														
CW	5000K														

D8 series Mini downlight




Catalog No. _____

Date _____

Type _____

Project _____

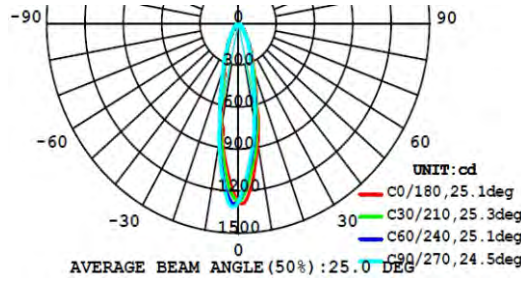




D8-7

Finishes:

- Silver
- White
- Bronze
- Black

Optical Lens:

- NFL (20 degrees)
- WFL (40 degrees)

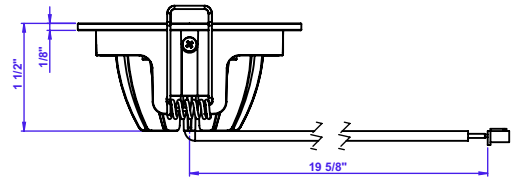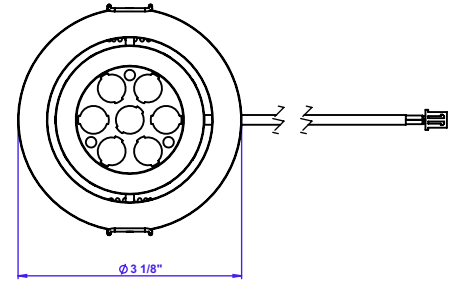

Description

D8-7 LED Puck Light is a 350mA mini puck & recessed cabinet light on a gimbal ring. Using D8-S07 surface collar will allow this series to be surface mounted. When using with matching constant current LED driver which allows multiple light fixtures to be connected with a single driver. 3000K or 5000K, 95 lm/watt 80+ CRI. (Optional 90+ CRI is available). ETL listed for USA & Canada.

LED Performance

- LED:** 7.05 watt @ 350mA typical
- SDCM:** 3 Step Macadam Elipse
- CCT:** 3000K, 5000K
- CRI:** >80 Typically 83 (Optional 90+ CRI is available)
- LIFE:** 70% of initial lumens after 50,000 hrs
- Warranty:** 5 Year Limited Fixture Warranty

Technical Specs

- 7.03W, 350mA constant current input
- 666 lumen
- Standard molex connection
- Dimmable (with Dimming Driver)
- Specify Driver separately
- 1 to 2, 1 to 4 and 1 to 6 multiple connectors
- NFL 20 degrees & WFL 40 degrees optical lens

Optional Accessories

- Dimmable drivers
- Multiple connector 1-2, 1-4 & 1-6
- Surface mount collar D8-S07
- Four finishes, Bronze, Black, Silver & White
- Cord extension

Ordering Codes

Follow the steps to specify your fixture. To order D8-7 LED puck NFL (20 degrees) in 3000K white finish


example:

① Base Code	② Lens Code	③ Color Code	④ CCT Code
D8-7	NFL 20 degrees	SV Silver WH White BK Black BZ Bronze	WW 3000K CW 5000K

D8S-01 ~7 series Surface collar

Catalog No. _____
 Date _____
 Type _____
 Project _____


D8S-01~7 surface collars for use with STDC08 series mini pucks

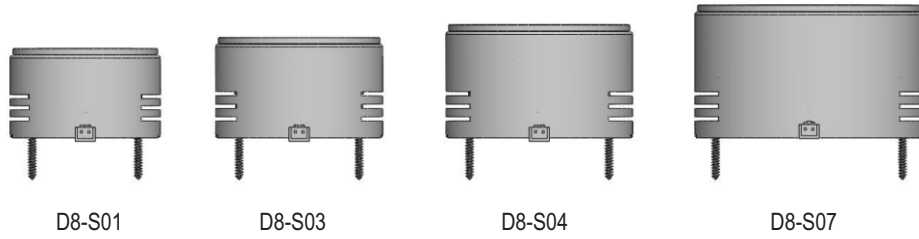

- Finishes:
- Silver
 - White
 - Bronze
 - Black

Description

D8-S01~7 mounting ring will allow this series to be surface mounted.
 Low profile design to match STDC08 series
 Machine crafted CNC aluminum housing
 Louver vents along housing allow heat to exit from side

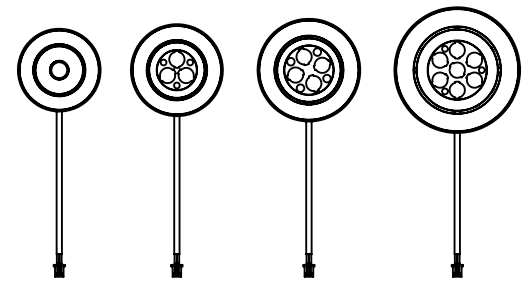


Warranty: 5 Year Limited Fixture Warranty

Ordering Codes


Follow the steps to specify your fixture. To order D08S-07 surface collar for use with STDC08-7 fixture in white finish

example: D8S-07-WH

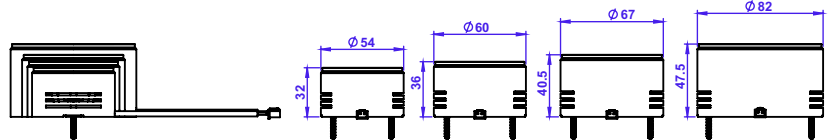

① Base Code	② Size Code	③ Color Code								
D8S	07	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; padding: 2px;">SV</td> <td>Silver</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">WH</td> <td>White</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">BK</td> <td>Black</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">BZ</td> <td>Bronze</td> </tr> </table>	SV	Silver	WH	White	BK	Black	BZ	Bronze
SV	Silver									
WH	White									
BK	Black									
BZ	Bronze									

D8-3F series Mini downlight



D8-3F shown in Silver Anodized Finish (SA)

Catalog No. _____



Date _____

Type _____


Project _____



Fixture with Mounting Collar and without for Recessed Installation.

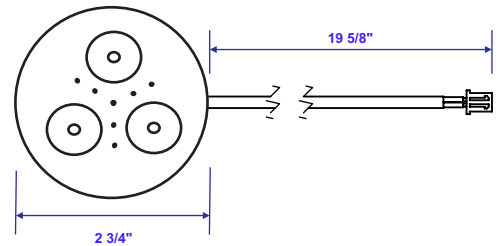

Finishes:

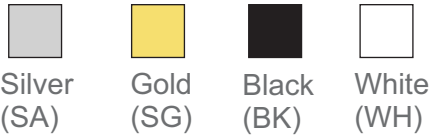

Description

D8-3F LED Puck Light is a 350mA mini puck & recessed cabinet light. Using D8-3F mounting ring will allow this series to be surface mounted. When using with matching constant current LED driver which allows multiple light fixtures to be connected with a single driver. 3000K or 5000K, 80 lm/watt 80+ CRI. ETL listed for USA & Canada.

LED Performance

LED: 3.04 watt @ 350mA
SDCM: 3 Step Macadam Elipse
CCT: 3000K, 5000K
CRI: >80 Typically 83 (Optional 90+ CRI is available)
LIFE: 70% of initial lumens after 50,000 hrs
Warranty: 5 Year Limited Fixture Warranty

Ordering Codes

Follow the steps to specify your fixture. To order D8-3F LED puck (120 degrees) White Finish, in WW, 3000K.

example: D8-3F-WH-WW

Technical Specs

- 3.04W, 350mA constant current input
- 240 lumen
- Standard molex connection
- Dimmable (with Dimming Driver)
- Specify Driver separately
- 1 to 2, 1 to 4 and 1 to 6 multiple connectors

Optional Accessories

- Dimmable drivers
- Multiple connector 1-2, 1-4 & 1-6
- Four finishes, Silver, Gold, Black & White
- Cord extension

① Base Code	② Lens Code	③ Code Colour	④ CCT Code												
D8-	3F (120 degrees)	<table border="0"> <tr><td>SA</td><td>Silver</td></tr> <tr><td>WH</td><td>White</td></tr> <tr><td>BK</td><td>Black</td></tr> <tr><td>SG</td><td>Gold</td></tr> </table>	SA	Silver	WH	White	BK	Black	SG	Gold	<table border="0"> <tr><td>WW</td><td>3000K</td></tr> <tr><td>CW</td><td>5000K</td></tr> </table>	WW	3000K	CW	5000K
SA	Silver														
WH	White														
BK	Black														
SG	Gold														
WW	3000K														
CW	5000K														