



P3 SERIES Premium Diffusion Light Bar



Catalog No. _____

P3 series Led Light Bar
available in 12" & 24"




P3 fixture includes
with 2 x P3-CLIP
1 x P3-CON Connector
and mounting screws






Date _____

Type _____


Project _____

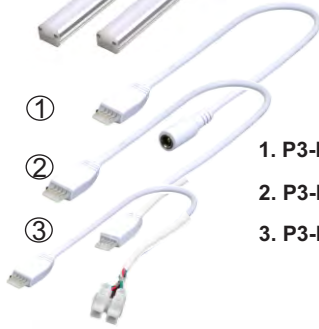


1. P3-PWR-DC (DC Plug Power Connector)
2. P3-FLEX (Flex Connector)
3. P3-PWR (Open Connector)

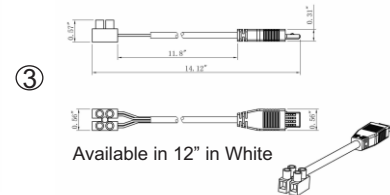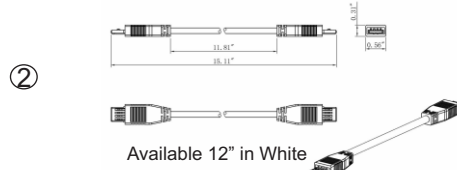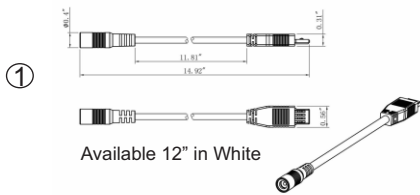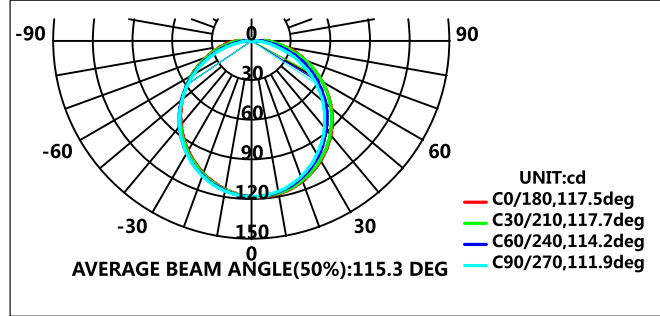


P3-CON(End to end Connector)



P3-CLIP (Flat Mounting Bracket) H=0.44"



P3-CLIP45 (90 Degree Bracket) H=0.81"



P3-CLIPSM (Swivel Bracket) H=1.16"

Description

P3 series LED Light bar is a 24V interlocking rigid cove light. It produces even illumination with out hot spot from a 1 & 2 foot length and 3/4" by 5/8" profile. Optional 90 degree swivel mounts for versatility. Dimmable driver specified separately. 12" DC or open powerfeed and 12" jumper connector are also available. Max 20 ft run or 40 ft (20 ft off each powerfeed) with center feed from same driver. 3000K or 4000K, 280 lumens with 80+ CRI. (Optional 90+ CRI is available). ETL listed for USA & Canada.

LED Performance

- LED: 2835
- SDCM: 3 Step Macadam Elipse
- CCT: 3000K, 4000K
- CRI: >80 Typically 83 (Optional 90+ CRI is available)
- LIFE: 70% of initial lumens after 50,000 hrs

Warranty: 5 Year Limited Fixture Warranty

Ordering Codes

Follow the steps to specify your fixture. To order a 12" in 3000K

example:

Technical Specs

- 4.8W, 24V DC constant voltage input
- 280 lumen
- Standard Output 48 LEDs
- Dimmable (with Dimming Driver) **See JCLD driver Spec sheet**
- Specify Driver separately

- 12" / 24" length linkable aluminum housing interlink system

- Included: flat mounting clip & interconnection

Optional Accessories

- powerfeed P3-PWR
- flexible jumper connector P3-FLEX
- hard docking connector P3-CON
- 0° fixed mounting clips P3-CLIP
- 45° swivel mounting clips P3-CLIP45
- 90° swivel mounting clips P3-CLIPSM

| 1 Base Code | 2 Code Length | 3 Code Colour | 4 Code CRI. | 5 Code Temperature |
|-------------|--------------------------|---------------|----------------|----------------------|
| P3 | 12 12 inch 24 24 inch | SV silver | 8 80+ 9 90+ | 30 3000K 40 4000K |