



T-Line series 120V LED Linear Pendant

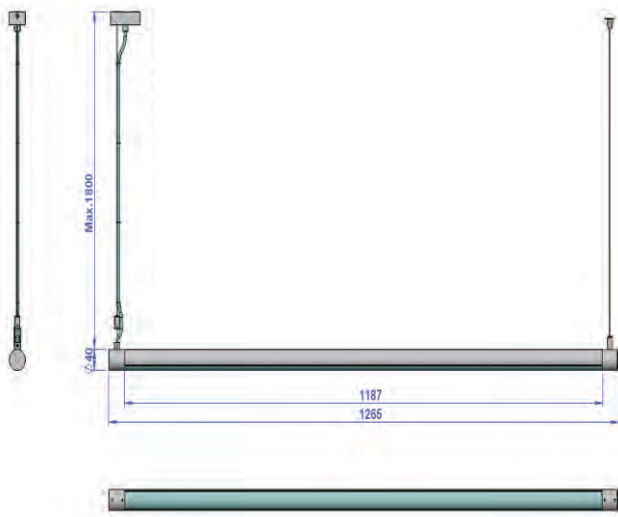

Features:

- Commercial grade Linear Pendant fixture
- 120 Line Voltage
- High Output, slim tubular design
- Fully Dimmable
- Protective front lens

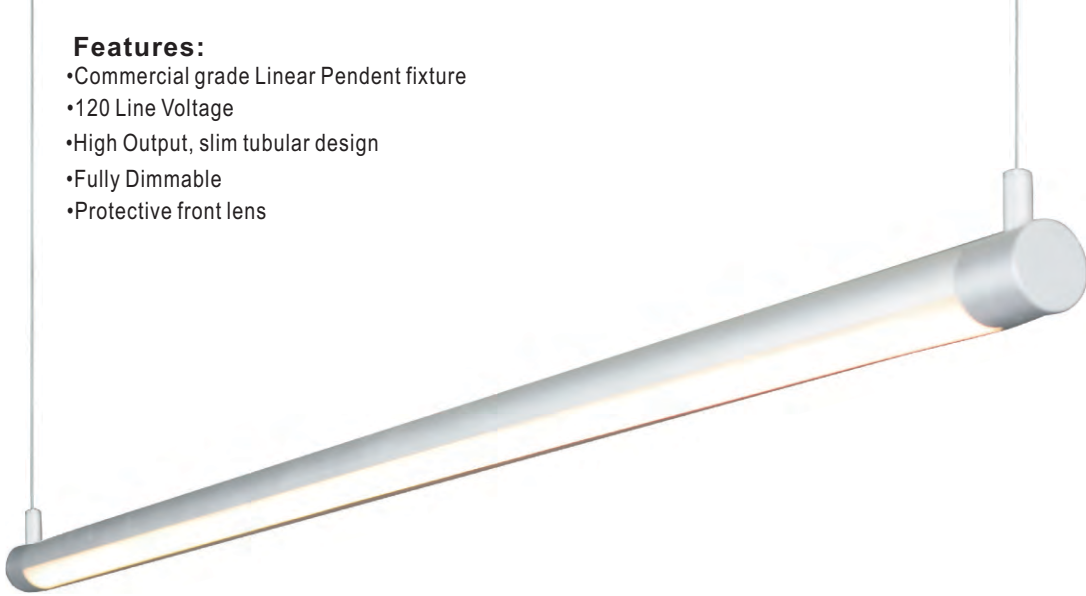

T-Line One


Single Linear Pendant Light

Input	120V 60Hz
LED	5630
Power Consumption	28W
Fixture Output	1820Lm (3000K)
Circuit	1 - Circuit
Rotate	Down Light only
Dimmable	YES
Size(mm)	40 x 1265 mm
ERP	65 lm/W
CRI	90+
Lamp Color	3000K / 4000K
Finish Color	Silver



T-One

T-Line series 120V LED Linear Pendant




- Features:**
- Commercial grade Linear Pendant fixture
 - 120 Line Voltage
 - High Output, slim tubular design
 - Fully Dimmable
 - Protective front lens




T-Line Two

Double Linear Pendant Light	
Input	120V 60Hz
LED	5630
Power Consumption	28W x 2 = 56W
Fixture Output	1820Lm x 2 =3640Lm(3000K)
Circuit	1- Circuit
Rotate	Down Light only
Dimmable	YES
Size(mm)	160 x 1265mm
ERP	65 lm/W
CRI	90+
Lamp Color	3000K / 4000K
Finish Color	Silver

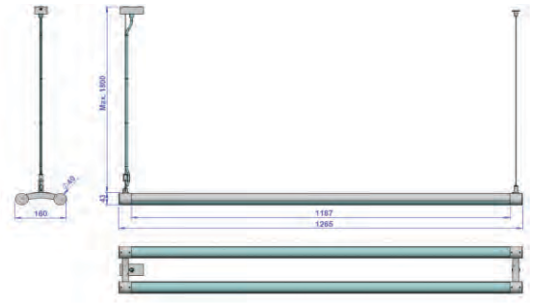



T-Two

T-Line series 120V LED Linear Pendant



Features:

- Commercial grade Linear Pendant fixture
- 120 Line Voltage
- High Output, slim tubular design
- Fully Dimmable
- Protective front lens

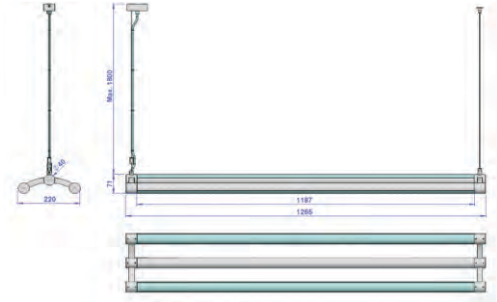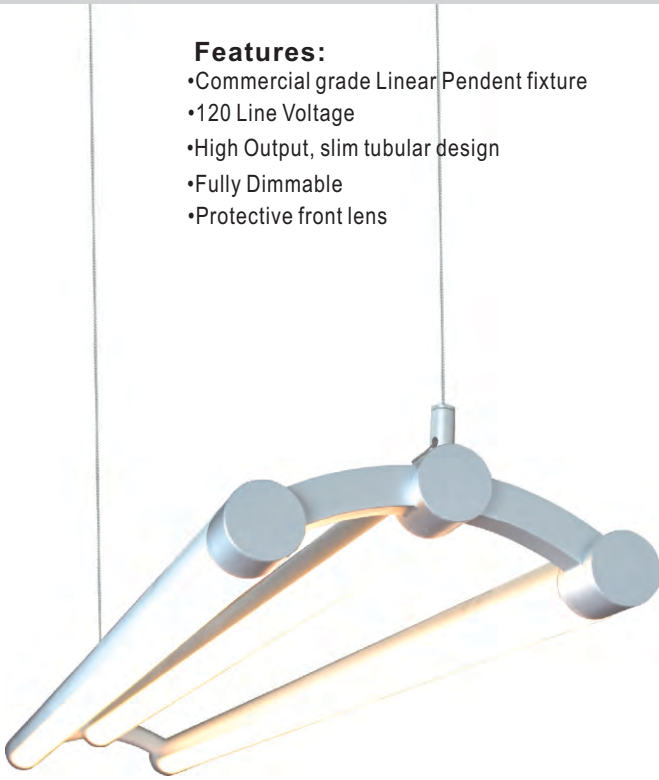

T-Line Three

Triple Linear Pendant light

Input	120V 60Hz
LED	5630
Power Consumption	28W x 3 = 84W
Fixture Output	1820 Lm x 3 =5460 Lm(3000K)
Circuit	2 - Circuit
Rotate	Down Light only
Dimmable	YES
Size(mm)	220 x 1265mm
ERP	65 lm/W
CRI	90+
Lamp Color	3000K / 4000K
Finish Color	Silver



T-Three