


# T4 series 120V Dimmable Under-cabinet lighting

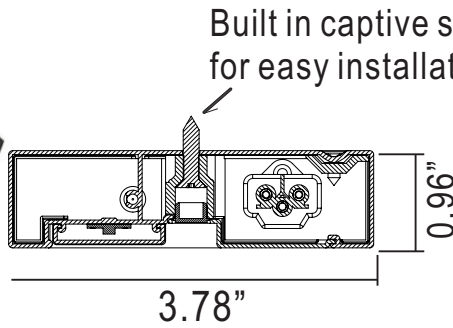

Catalog No. \_\_\_\_\_

Date \_\_\_\_\_

Type \_\_\_\_\_

Project \_\_\_\_\_


### ■ Fixture includes:

- Complete ready to install under-cabinet fixture
- Captive mounting screw already on fixture
- 1/2" Die-Cast metallic cable clamp
- Directly end-to-end connector



### ■ T4 series Dimensions for ordering codes:

- 8" fixture total length = 8.70" order code length = L200BD01
- 12" fixture total length = 12.30" order code length = L300BD01
- 18" fixture total length = 18.20" order code length = L450BD01
- 24" fixture total length = 24.20" order code length = L600BD01
- 32" fixture total length = 32.70" order code length = L800BD01

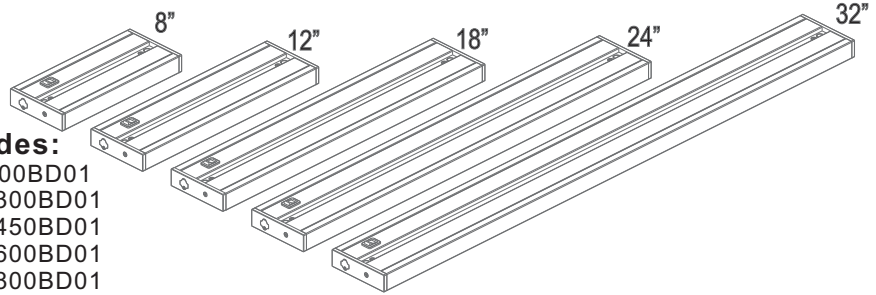

### ■ Accessories:

Item No.	Description
LJP 0150	6" Jumper/flex cord
LJP 0300	12" Jumper/flex cord
LJP 0600	24" Jumper/flex cord
LJP 1800	72" Jumper/flex cord
LPC1800	72" 3 prong Cord & plug set

(Portable UL153 standard listing)

LJP & LPC cords available in **black or white** color only

Available in five sizes:  
Lengths = 8" (L200) | 12" (L300) | 18" (L450)  
24" (L600) | 32" (L800)



JBL Direct wire junction box with switch  
 JBL-OCS Direct wire Occupancy sensor box with switch  
 JBL is under UL1598 standard as hardwired junction box  
 available color is white and bronze same as under-cabinet fixtures  
 For JBL Spec sheet please refer to JBL series for details

Photometric data and LM 79 report please refer to our web site

### Finishes:



Bronze (BZ)



White (WH)


### Description

T4 series is a low profile under-cabinet fixture under 1" in height. Bright LED that is dimmable with most incandescent dimmers it provides even illumination from our diffuse lens to provide excellent lighting effect. Cool to touch operation and virtually no heat, no UV or forward heat. Low profile height = 0.96 inches, 5 sizes to choose from. Rear raceway cover and 1/2 inch knockout along back and top of fixture housing for easy access. Modular design for maximum flexibility and quick installation via captive screws.

### LED Performance

- LED: 5630
- SDCM: 3 Step Macadam Elipse
- CCT: 3000K, 4000K
- CRI: >80 Typically 83 (Optional 90+ CRI is available)
- LIFE: 70% of initial lumens after 50,000 hrs
- Warranty: 5 Year Limited Fixture Warranty

### Available accessories for T4 series

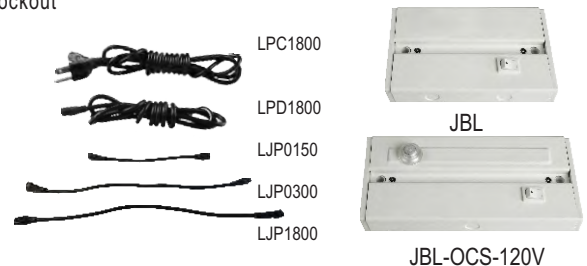

Example: To order T4 under-cabinet fixture in 24" white and 3000K = **T4L600BD01WH830**

1 Item Code	2 Length Code	3 Finish Code	4 CCT Code								
T4	L600BD01	<table border="1"> <tr> <td>WH</td> <td>White</td> </tr> <tr> <td>BZ</td> <td>Bronze</td> </tr> </table>	WH	White	BZ	Bronze	<table border="1"> <tr> <td>830</td> <td>3000K</td> </tr> <tr> <td>840</td> <td>4000K</td> </tr> </table>	830	3000K	840	4000K
WH	White										
BZ	Bronze										
830	3000K										
840	4000K										

### Technical Specs

- 5 different sizes dimmable under-cabinet fixtures
- 2.8~10.8 W dimmable under-cabinet fixtures
- Typical 250 lumen/foot
- Listing for hardwired and portable application
- Dimmable
- Linkable up to 400 watt
- Comply with Energy Star certifications.