

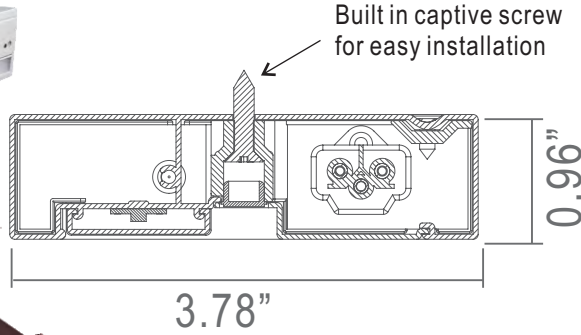


T4E series 120V Premium Diffusion (No Hot Spot) Under-cabinet lighting

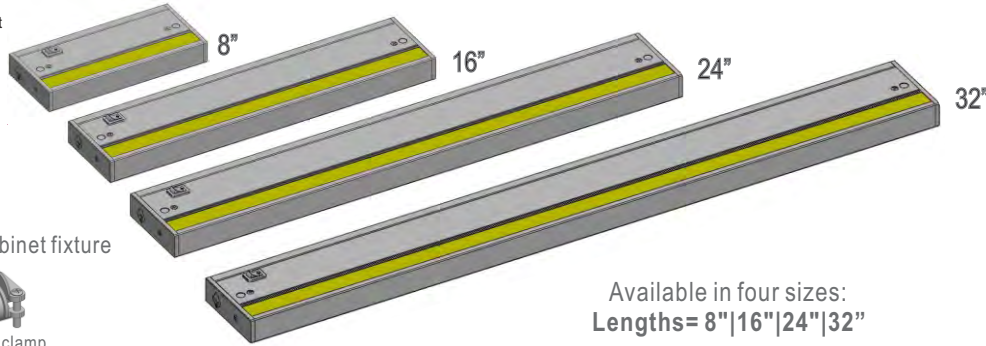

Catalog No. _____
 Date _____
 Type _____
 Project _____

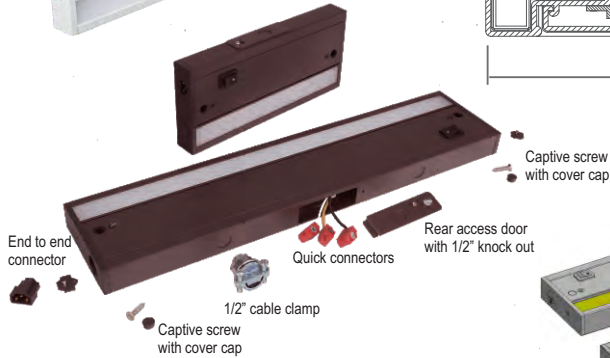

- Fixture includes:**
- Complete ready to install Premium Diffusion under-cabinet fixture
 - Captive mounting screw already on fixture
 - 1/2" Die-Cast metallic cable clamp
 - Directly end-to-end connector



Available in four sizes:
 Lengths= 8"|16"|24"|32"

T4E 120V Dimensions for ordering codes:

- 8" order code length = T4E8XX930
- 16" order code length = T4E16XX930
- 24" order code length = T4E24XX930
- 32" order code length = T4E32XX930




Accessories:

Item No.	Description
JBL	Direct wire junction box
JBL-OCS-120V	120V Direct wire Occupancy sensor box

JBL is under UL1598 standard as hardwired junction box available color is white and bronze same as under-cabinet fixtures. For JBL Spec sheet please refer to JBL series for details. Photometric data and LM 79 report please refer to our web site.

Finishes:



Bronze (BZ)



White (WH)

Description


T4E-277V series is our premium diffusion no hot spot work station fixture just under 1" in height. High 90+ CRI provides excellent lighting effects. (Non-dimmable fixture) Cool to touch operation and virtually no heat, no UV or forward heat. Four sizes to choose from, rear raceway cover and 1/2 inch knockout along back and top of fixture for easy access. Modular design for maximum flexibility and quick installation via captive screws.

LED Performance

- LED: 5630
- SDCM: 3 Step Macadam Elipse
- CCT: 3000K, 4000K
- CRI: >90+ Typically 95
- LIFE: 70% of initial lumens after 50,000 hrs
- Warranty: 5 Year Limited Fixture Warranty

Example: To order T4E under-cabinet fixture in 24" white and 3000K = **T4E24WH930**

Available accessories for T4E series


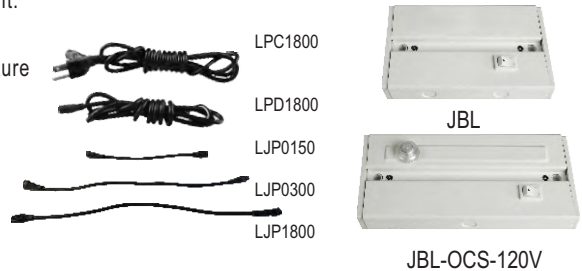


1 Item Code	2 Length Code	3 Finish Code	4 CCT Code
T4E	24	WH White BZ Bronze	930 3000K 940 4000K

Technical Specs

- 4 different sizes Premium Diffusion dimmable fixtures
- 5.3~17.3 W dimmable under-cabinet fixtures
- 250 ~ 1100 lumens output
- Hardwired and portable listing
- Linkable up to 400 watt
- Canada / USA ETL listing

T4E-277V series 277V Premium Diffusion (No Hot Spot) Work Station lighting

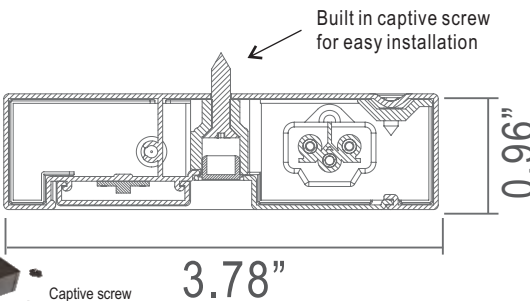

Catalog No. _____
 Date _____
 Type _____
 Project _____

■ Fixture includes:

- Complete ready to install Premium Diffusion fixture
- Captive mounting screw already on fixture
- 1/2" Die-Cast metallic cable clamp
- Direct end-to-end connector

■ T4E 277V Dimensions for ordering codes:

- 8" order code length = T4E8XX930-277V
- 16" order code length = T4E16XX930-277V
- 24" order code length = T4E24XX930-277V
- 32" order code length = T4E32XX930-277V


■ Accessories:

Item No.	Description
JBL-OCS-277V	277V Direct wire Occupancy sensor box

JBL-OCS-277V is under UL1598 standard as hardwired junction box available color is white and bronze same as fixtures For JBL-OCS-277V Spec sheet and Photometric data and LM 79 report please refer to our web site



Available in four sizes:
 Lengths = 8" | 16" | 24" | 32"



Finishes:



Bronze (BZ)



White (WH)

JBL-OCS-277V * Note: OCS in 277V do not have on/off switch

Description

T4E-277V series is our premium diffusion no hot spot work station fixture just under 1" in height. High 90+ CRI provides excellent lighting effects. (Non-dimmable fixture) Cool to touch operation and virtually no heat, no UV or forward heat. Four sizes to choose from, rear raceway cover and 1/2 inch knockout along back and top of fixture for easy access. Modular design for maximum flexibility and quick installation via captive screws.

LED Performance

- LED: 5630
- SDCM: 3 Step Macadam Elipse
- CCT: 3000K, 4000K
- CRI: >90+ Typically 95
- LIFE: 70% of initial lumens after 50,000 hrs
- Warranty: 5 Year Limited Fixture Warranty

Technical Specs

- 4 difference sizes Premium Duffusion 277V fixtures
- 5.3~17.3 W rating
- 250 ~ 1100 lumens output
- Listing for hardwired 277V application only
- Non-dimmable, non portable application.
- Linkable up to 400 watt
- Canada / USA ETL listing.

Optional Accessories

- JBL-OCS-277V 277V Direct wire Occupancy sensor

Example: To order T4E-277V fixture in 24" white and 3000K = **T4E24WH930-277V**

1 Item Code	2 Length Code	3 Finish Code	4 CCT Code	5 Voltage Code
T4E	24	WH White BZ Bronze	930 3000K 940 4000K	277V