


U1SGL SERIES Step Light




Catalog No. _____

Date _____

Type _____


Project _____

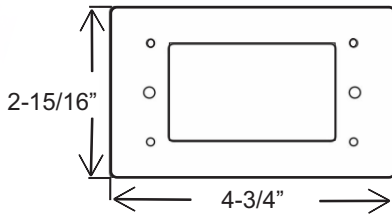

U1-SLG-XX-XXX



U1-SGL-SM-XX



Trim Selection (shown with U1SGL-SM Face Plate)

Sample Ordering Code:

Step Light HL Trim in Dark Bronze = U1SGL-HL-DB + U1SGL-SM-DB


Note: It is possible to order different finishes in both trim & face plate

Step Light Trim Dimension

2-15/16" H x 4-3/4" W x 3/8" D

Finishes

WH SS DB

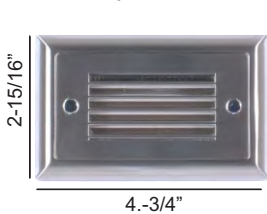

U1-SGL-HL(Horizontal Louver) U1-SGL-VL(Vertical Louver) U1-SGL-MT-PTL (Frosted Lens) U1-SGL-VS (Vertical Scoop) U1-SGL-LUV (Horizontal Shroud)

SPECIFICATIONS & FEATURES

Housing:

Energy efficient, compact LED Step Lights provide maintenance free illumination in excess of 50,000 hours. Suitable for interior and exterior applications.

Constructed of high impact, weather resistant polycarbonate.

Compact size with Integral universal 100-277V driver for simple wiring and easy installation into U.S.A. standard 2 x 4 junction boxes.

Durable, die-cast zinc-magnesium trim plate in five styles and three finishes.

Lamp & Electrical:

LED light module available in 3000K (WW), 4000K (NW), 5000K (CW), Amber and Blue color temperatures.

7" Wire leads length.

Total wattage: 1.5 W @ 35mA.

Electrical rating: 100-277V 50/60 Hz universal voltage, non-dimmable. 12V DC Class 2 using DC 12V power source.

Emergency back up, with inverter system by others.

Day light sensor by others.

Mounting:

LED Step Light can be mounted to 2" x 4" standard junction box using mounting screws provided.

Product is IP-65 rated, includes a 2" x 4" gasket for exterior applications and eliminating light leak.

Warranty:

This complete LED Step Light fixture is cover by a full five (5) years replacement guarantee after day of purchase.

Safety Listing:

C/US UL Listed for Wet & Dry locations.

Ordering Information

Example Order: **U1 step light horizontal louver, 3000K in dark bronze finish.**

LED Step Light Fixture 120V + Color Temperature + Face Plate Finish + Trim Plate Finish

U1-SLG-WW-UNI + U1SLG-SM-DB + U1SGL-HL-DB